

 **REGENT**  
LIGHTING



**ARMY 2**

Smaller yet stronger

PEOPLE LIGHT OUR WAY

## ARNY 2

Real lighting power<sup>2</sup>  
for even higher demands

**ARNY 2** is the logical continuation and perfection of the proven ARNY high-bay luminaire. It is now even more compact and lighter, has even more lighting power and can be used as a single luminaire or in clusters of 2 or 3.



**ARNY 2** is suitable for ceiling, wall, pendant and trunking mounting, for example in warehouses or sports halls. It not only has a strong design, but is also extra resistant with an impact resistance of up to IK10 and a new IP66 protection against dust and strong jets of water. In addition, a version for extreme temperatures from -30°C to +65°C is available.

## Flexible


---

The possible connection to the TRAQ continuous-row lighting system (as a complete system IP54) ensures simple ceiling mounting. Luminaires can be quickly repositioned at a later date.

## Easy to maintain

---

If necessary, the control gear can be replaced from below without dismantling the luminaire.

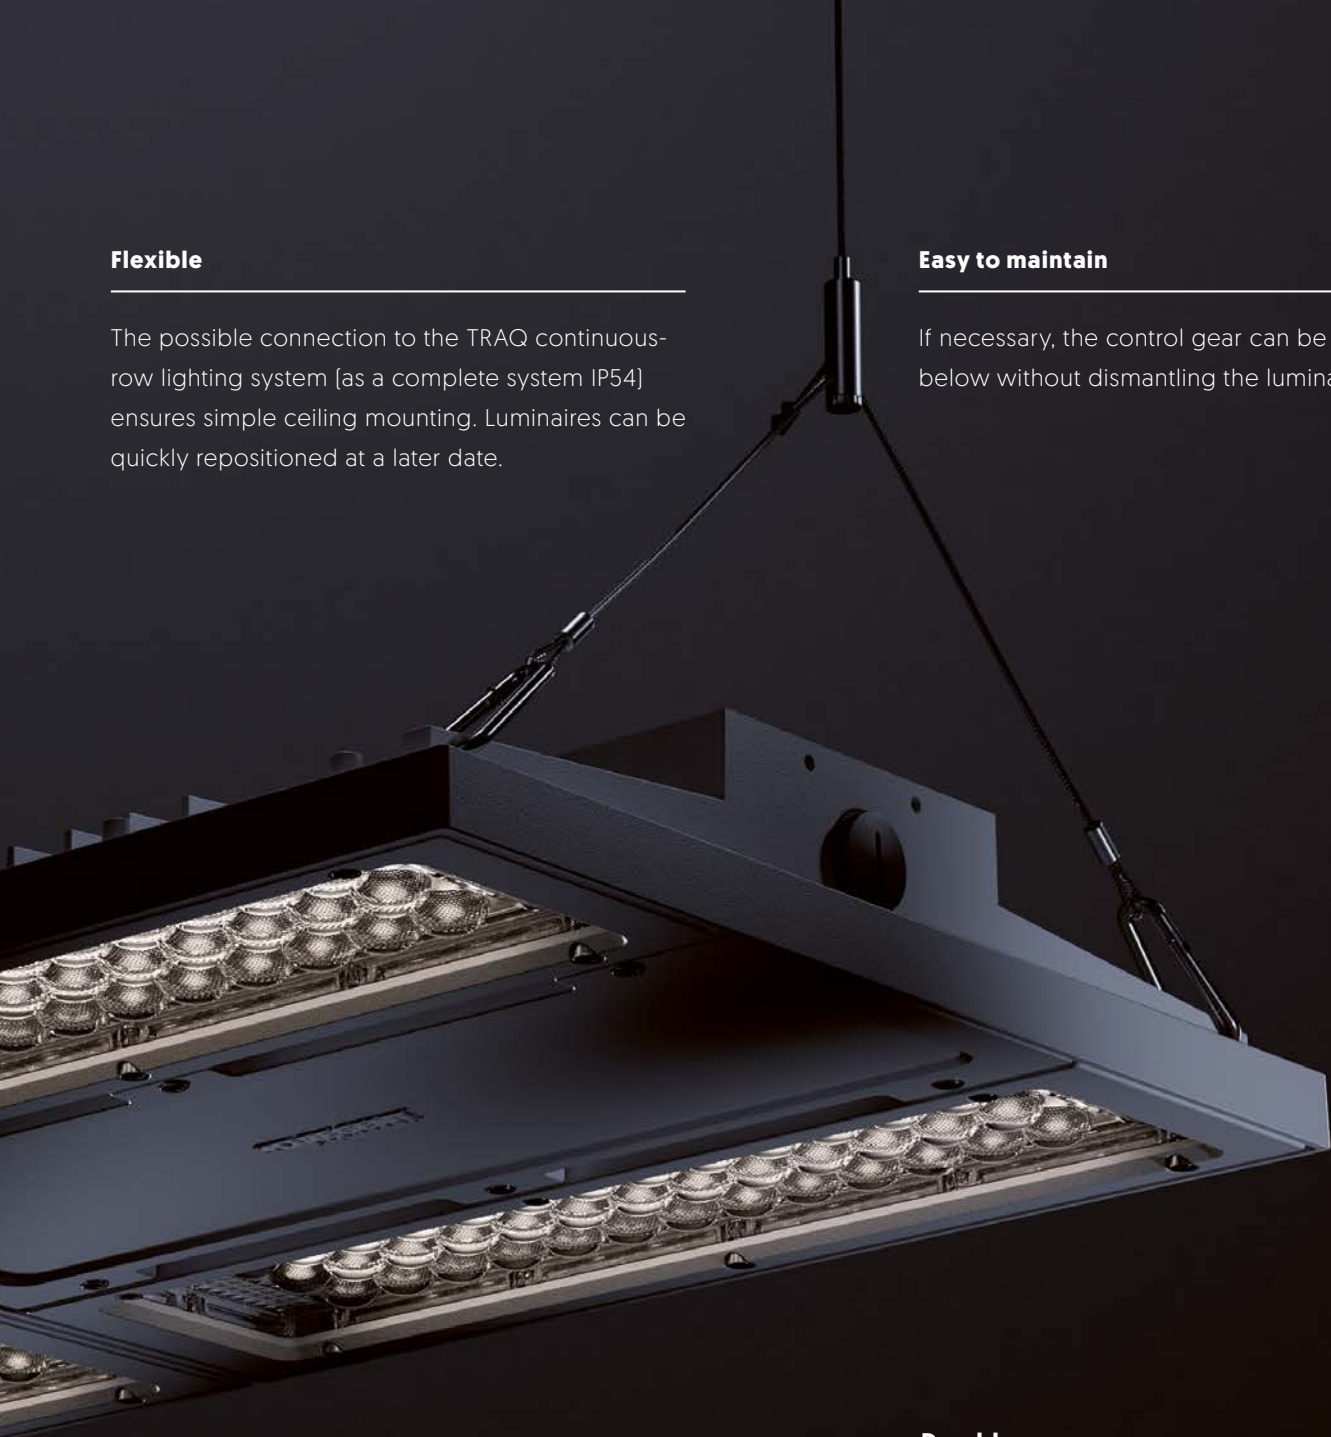

## Efficient

---

- Light control via DALI2
- Precise light control: 2 beam angles selectable
- For ceiling heights up to 20 m High luminaire efficiency of up to 160 lm/W
- 3 lumen packages perfectly meet the requirements of industrial and logistics applications
- Optionally available with integrated motion and brightness sensor for high energy efficiency (PIR)

## Durable

---

- Decoupling of control gear and LEDs
- Efficient thermal management
- Guaranteed long LED service life




**read the full story:**



# ARNY 2

## Product range overview

<b>ARNY 2</b> High-bay luminaire	
<b>Sizes</b>	
S, M, L [2, 4 or 6 LED panels]	
365 x 365, 365 x 732, 365 x 1'099 mm	
<b>Luminous flux of luminaire</b>	
16'000 lm, 32'000 lm, 48'000 lm	
<b>Colour temperature</b>	
4'000 K, 6'500 K	
<b>Colour renderings</b>	
Ra ≥80	
<b>Colour</b>	
White	
<b>Light control</b>	
DALI2	
<b>Protection class / impact resistance</b>	
IP66 / IK10 [PC], IP66 / IK08 [PMMA]	

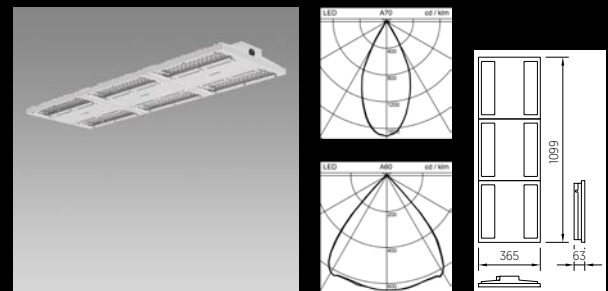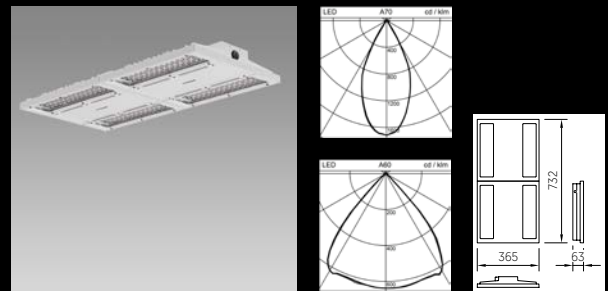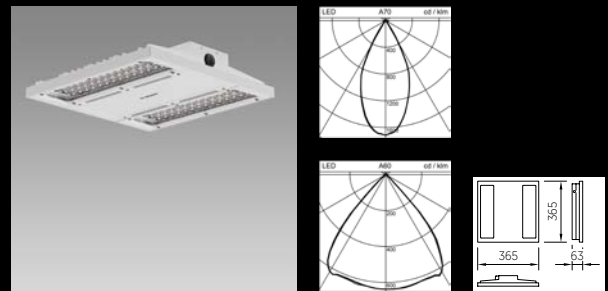

**Optional:** available with built-in sensor [PIR]

For more information, please visit [www.regent.ch/en/anry2](http://www.regent.ch/en/anry2)  
#peoplelightourway



Subject to technical modifications.  
Regent assumes no liability for printing errors.